


SERIE VAV

VAV



VAV

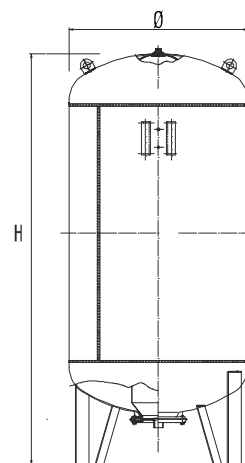

Vaso autoclave con membrana intercambiabile per circuiti di acqua sanitaria.
 Pressure tank with replaceable membrane for pressurized systems of sanitary water.
 Réservoir sous pression à vessie remplaçable pour systèmes d'eau sanitaire.
 Vertikales Druckausdehnungsgefäß mit austauschbarer Membrane für Trinkwassersysteme.

Temperatura d'esercizio -10°C
 Working temperature
 Température d'exercice +100°C
 Betriebstemperatur

Colore della verniciatura esterna
 External finish color
 Couleur de la peinture externe
 Externe Beendenfarbe

RAL 3000

Membrana in gomma
 Rubber membrane
 Vessie en gomme
 Gummimembrane **EPDM**

Controflangia verniciata - Painted counter flange
 Contre-bride peinte - Lackierter Gegenflansch



Garanzia sul prodotto mesi: - Warranty months:
 Garantie mois: - Monate Garantie:

24

Modello Model Modèle Model	Codice Code Code Code	Altezza Height Hauteur Höhe H (mm)	Diametro Diameter Diamètre Durchmesser Ø (mm)	Lunghezza Length Longeur Länge L (mm)	Pressione massima d'esercizio Maximun working pressure Pression maximale d'exercice Maximaler Betriebsdruck (bar)	Pressione di precarica standard Standard precharge pressure Pression de précharge standard Vordruck (bar)	Imballo Packing Emballage Verpackung (mm)	Attacco Connection Raccordement Anschluss (inch)
VAV750	AAXVH31R31GPO	1713	800	-	10	4	(Pz1) 800X800X1863	2"
VAV1000	AAYVH31R31GPO	1863	800	-	10	4	(Pz1) 800X800X2013	2"
VAV1500	AAZVH31R31GPO	2360	960	-	10	4	(Pz1) 1200X1200X2500	2"

Temperatura d'esercizio -10°C
 Working temperature
 Température d'exercice +70°C
 Betriebstemperatur

Colore della verniciatura esterna
 External finish color
 Couleur de la peinture externe
 Externe Beendenfarbe

RAL 3000

Membrana in gomma
 Rubber membrane
 Vessie en gomme
 Gummimembrane **BUTYL**

Controflangia verniciata - Painted counter flange
 Contre-bride peinte - Lackierter Gegenflansch



Garanzia sul prodotto mesi: - Warranty months:
 Garantie mois: - Monate Garantie:

24

Modello Model Modèle Model	Codice Code Code Code	Altezza Height Hauteur Höhe H (mm)	Diametro Diameter Diamètre Durchmesser Ø (mm)	Lunghezza Length Longeur Länge L (mm)	Pressione massima d'esercizio Maximun working pressure Pression maximale d'exercice Maximaler Betriebsdruck (bar)	Pressione di precarica standard Standard precharge pressure Pression de précharge standard Vordruck (bar)	Imballo Packing Emballage Verpackung (mm)	Attacco Connection Raccordement Anschluss (inch)
VAV2000	AAAVH32R32GPO	2433	1100	-	10	4	(Pz1) 1200X1200X2583	2"
VAV3000	AABVH32R32OPO	2823	1250	-	10	4	(Pz1) 1250X2973X1350	DN65
VAV4000	AA4VH32R62QPO	3200	1450	-	10	4	(Pz1) 1600X3350X1450	DN80
VAV5000	AA5VH32R72QPO	3645	1450	-	10	4	(Pz1) 1600X3795X1450	DN80
VAV10000	AA1VH32R82QPO	5750	1600	-	10	4	(Pz1) 1750X5750X1600	DN80

Marchi CE secondo la Direttiva - CE marked according to Directive - Avec le marque CE selon la Directive - CE Kennzeichnung
 2014/68/UE