




- + Integrated float switch: makes the pump suitable for limited spaces.
- + Manual and automatic working
- + Minimum draining level 2mm (man)
- + Integrated check valve



PERFORMANCE CURVE

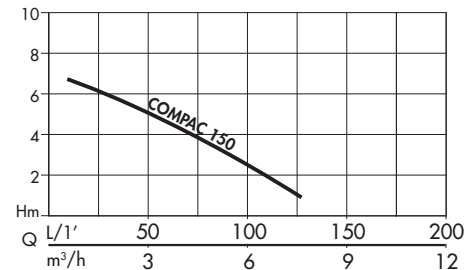

Model: COMPAC 150
Part number: N1080030
Barcode: 8010583317176

Submersible pump for clear water. Motor shaft in stainless steel, single phase NORYL hydraulic system. COMPAC pumps are equipped with 10 m power cable with plug and can be used in manual or automatic version with float switch

Applications

- drainage of standing water and domestic waste water.
- flooded rooms emptying and drying
- water drawing from wells, basins or cisterns

Accessories

KIT DR

PIPE KIT



Technical data

Absorbed power	300 W	Max temp. of pumped fluid:	40°C
Voltage:	230 V	Max.size of impurities:	5 mm
Flow rate:	8500 l/h	Start/stop:	140mm/30mm
Max.Head	7 m	Weight:	4.7 kg
Pump body	Polypropylene	Packaging dimensions:	23 x 19.5 x 29 cm
Pump outlet diameter:	41,90 mm (1"1/4 M)	PCS per pallet:	60
Min. draining level:	2mm/30mm (man/aut)	Accessories:	Adjustable connector/check valve
Max depth of immersion:	7m		






- + Integrated float switch: makes the pump suitable for limited spaces.
- + Manual and automatic working
- + Minimum draining level 2mm (man)
- + Integrated check valve



PERFORMANCE CURVE

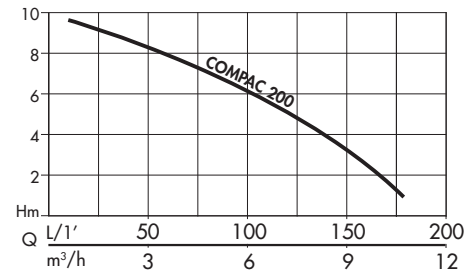

Model: COMPAC 200
Part number: N1080040
Barcode: 8010583317183

Submersible pump for clear water. Motor shaft in stainless steel, single phase NORYL hydraulic system. COMPAC pumps are equipped with 10 m power cable with plug and can be used in manual or automatic version with float switch

Applications

- drainage of standing water and domestic waste water.
- flooded rooms emptying and drying
- water drawing from wells, basins or cisterns

Accessories

KIT DR

PIPE KIT



Technical data

Absorbed power	650 W	Max temp. of pumped fluid:	40°C
Voltage:	230 V	Max. size of impurities:	5mm
Flow rate:	11500 l/h	Start/stop:	140mm/30mm
Max. Head	10m	Weight:	5.6 kg
Pump body	Polypropylene	Packaging dimensions:	23 x 19.5 x 29 cm
Pump outlet diameter:	41,90 mm (1"1/4 M)	PCS per pallet:	60
Min. draining level:	2mm/30mm (man/aut)	Accessories:	Adjustable connector/check valve
Max depth of immersion:	7m		

