



NOVAX Oil

230 V - 50 Hz a.c.
INOSSIDABILE - INOXDABLE



"Sweet transferring"




NOVAX 10 Oil

PAT.PEND.




NOVAX 14 Oil

PAT.PEND.

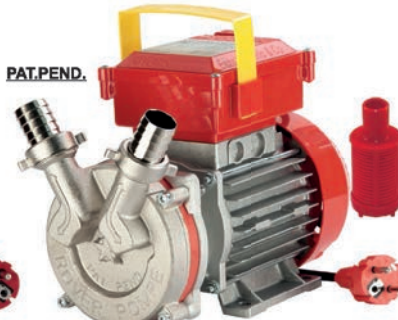

NOVAX 25 Oil




COMUTATORE
ROCKER SWITCH
IN INTERRUPTOR PULSADOR
DRUCKKNOPFSCHALTER




PAT.PEND.

NOVAX 30 Oil

PAT.PEND.

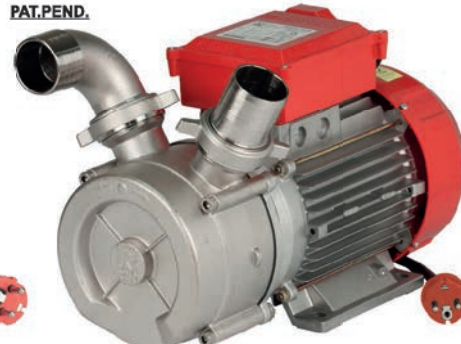

NOVAX 50 M

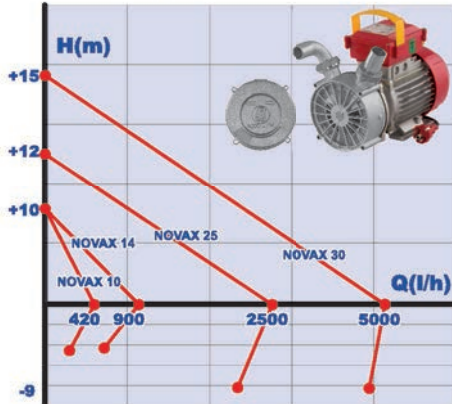

Code	Model	L / h (olive oil - water)	ØD mm	HP	Hmax(m)	r.p.m.	A X B x H	Kg.	EAN code
4200	NOVAX 10 Oil	300 - 420	10	0.4	10	2850	210x120h190	4	8032706071529
800000	NOVAX 14 Oil	600 - 900	14	0.6	10	1450	230x120h190	5	8032706070232
998000	NOVAX 25 Oil	1800 - 2500	25	0.9	12	1450	250x120h190	8	8032706071291
640000	NOVAX 30 Oil	3000 - 5000	30	1.2	15	1450	310x150h210	11	8032706070270
740000	NOVAX 50 M	11000 - 15000	50	3.0	20	1450	400x170h240	22	8032706070300