



PoolFilter UBBINK® Pool Filters

Excellence for your Lifestyle!



Poolmax

Crédits - Disclaimer page - Privacy policy - © Black Box Design



TECHNICAL INFORMATION

Model	POOLFILTER 300	POOLFILTER 400	POOLFILTER 500	POOLFILTER 600
Art. no.	7504616	7514704	7514705	7504617
Sand filter				
Outer diameter of filter	300 mm (12")	400 mm (16")	500 mm (12")	600 mm (12")
Flow rate (5m water column)	max. 10 m³/h	max. 17 m³/h	max. 17 m³/h	max. 17 m³/h
Pressure of system	max. 2.5 bar	max. 2.5 bar	max. 2.5 bar	max. 2.5 bar
Multiple channel valves				
Filling with silica filter sand	max. 25 kg	max. 50 kg	max. 75 kg	max. 100 kg
Sand grain (EN 12904:2005)	0.60 - 1.25 mm	0.60 - 1.25 mm	0.60 - 1.25 mm	0.60 - 1.25 mm
Valve	4 ways	4 ways	4 ways	4 ways
Suction and backflow connections	1 1/2"	1 1/2"	1 1/2"	1 1/2"
Functions	Winter / Filtration / Wash / Rinse	Winter / Filtration / Wash / Rinse / Circulation / OFF		
Accessories included				
Pressure gauge	1	1	1	1
Guarantee	2 years	2 years	2 years	2 years




Model	Poolfilter 400
Art. no.	7514704
SAN CODE	8 711465 147040

Model	Poolfilter 500
Art. no.	7514705
SAN CODE	8 711465 147057

Model	Poolfilter 600
Art. no.	7504617
SAN CODE	8 711465 046176

TECHNICAL DRAWINGS

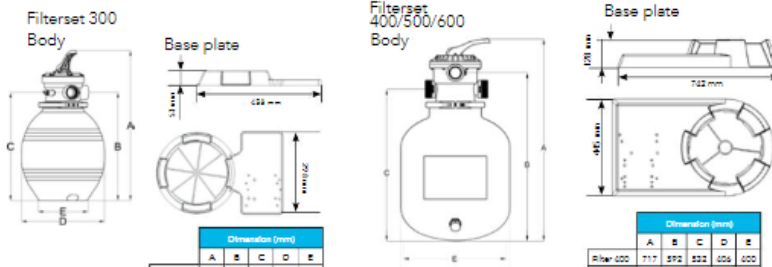

Poolmax pumps are specifically designed for the swimming pool domain: the Poolmax® range of pumps. Each model has been certified by an independent laboratory. Thus the Poolmax pumps have the "TDV-GS" stamp and naturally they comply with current standards for electrical wiring as well as with the new RoHS directive.



Residual Current Device (RCD)
Art. no. 7534147



Each Poolmax pump also comes with an additional cable e.g. for the use of a timer switch. Cables should only be exchanged by an authorised electrician!
Art. no. 7534150



	Flow rate (m³/h)	Height (m)	Power (kW)	Pressure (bar)	Temp. (°C)
POOLMAX TP 25	5000 l/h	5.8 m	22.00/50 mm / 50 Hz / 1.9 A	0.55 CV / 0.33 kW	1.5 m / max. 2.5 bar / 30° C
POOLMAX TP 25	12600 l/h	11.0 m	25 mm / 50 mm / 20 A	0.5 CV / 0.37 kW	1.5 m / max. 2.5 bar / 30° C
POOLMAX TP 75	14,000 l/h	10.5 m	25 mm / 50 mm / 20 A	0.75 CV / 0.55 kW	1.5 m / max. 2.5 bar / 30° C
POOLMAX TP 120	12,000 l/h	12.0 m	25 mm / 50 mm / 20 A	1.5 CV / 0.90 kW	1.5 m / max. 2.5 bar / 30° C
POOLMAX TP 150	21,400 l/h	14.0 m	25 mm / 50 mm / 20 A	1.5 CV / 1.10 kW	1.5 m / max. 2.5 bar / 30° C

