





GHN 25/60-180

GHN / Threaded circulation pumps with three speeds
Heating, Climatisation

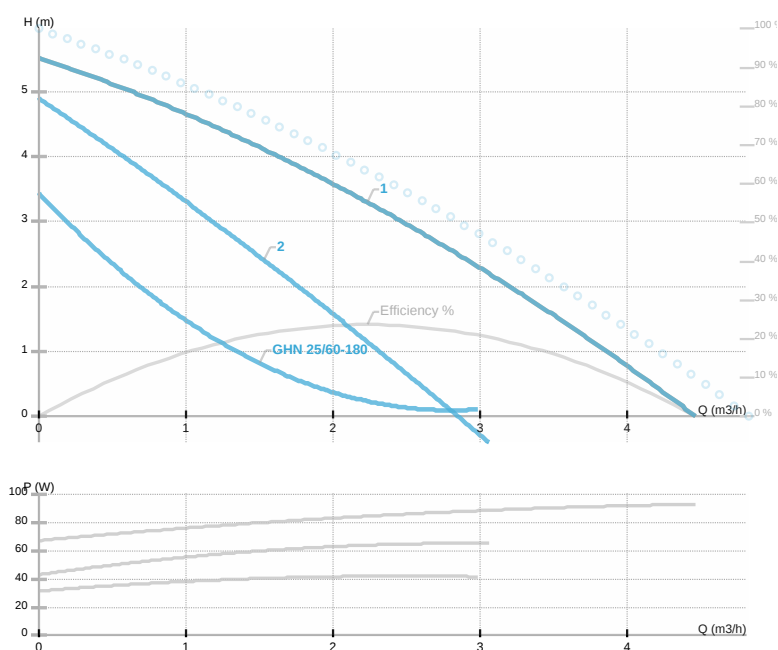

Part number	979521713
Power supply	1~230 V
Declared protection	IP44
Q max	3.5 [m3/h]
H max	6.0 [m]
RPM	1080 - 1980 [1/min]
Motor power	90 [w]
Declared current	0.39 [A]
Fluid	Water VDI 2035, glycol 40%
Fluid temperature	-10.0 ÷ 110.0 [°C]
Insulation class	H
DN	25 [mm]
Connector	Rp 1
Net weight	2.50 [kg]
Length	180 [mm]
Approvals	EAC
EEI	
Efficiency	[%]
Impeller material	Noryl 1630V
Bearing material	Graphite
Shaft material	AISI 420
Hydraulics material	Gray cast iron
Mains frequency	50 Hz
Connection	Rp 1
Max pressure	Max 10 bar
Ambient temp.range	35 deg C

Drawing

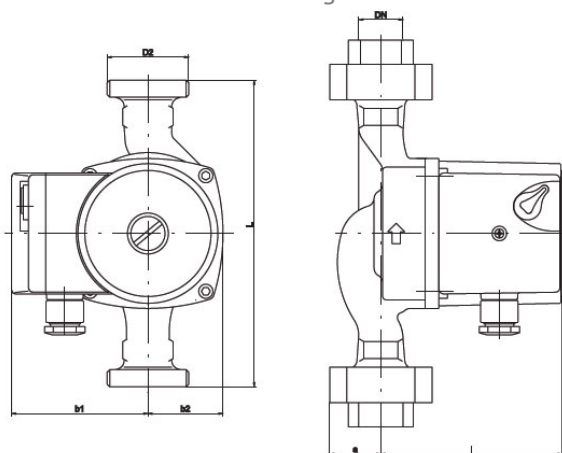

DN=25 D2=1 1/2" L=180 l=108 b1=80 b2=44 a=28

Electrical wiring

