



## TECHNICAL DATA

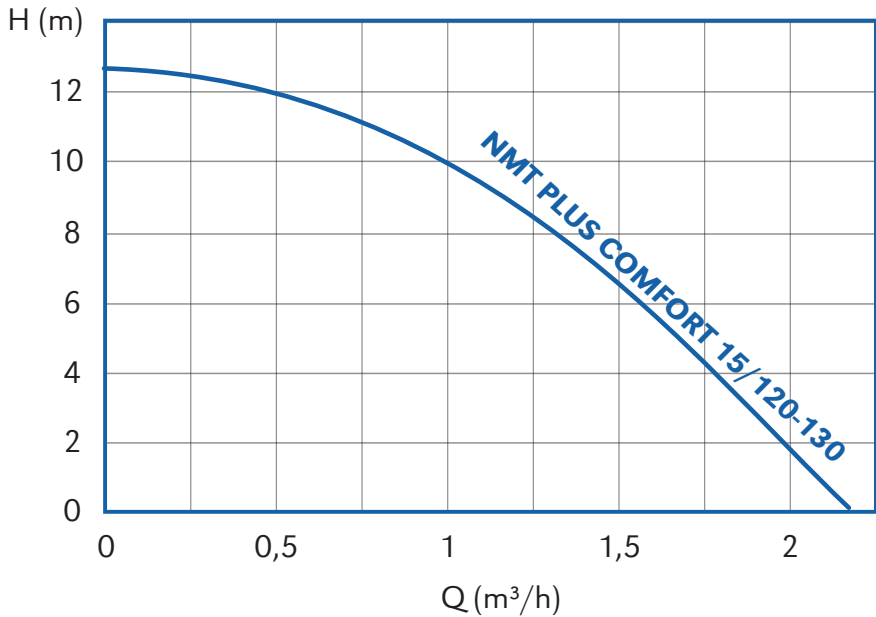

Technical specification	
Code	979527308
Q <sub>max</sub>	up to 2,2 m <sup>3</sup> /h
H <sub>max</sub>	up to 12,2 m
DN	15
Pipe connection	G 1
Installation	threaded
Insulation class	F
Degree of protection	IP 44
Fitting length	130
Voltage	1 ~ 230V, 50 Hz
P <sub>max</sub> [W]	100
I <sub>max</sub> [A]	0,8
Ambient temperature	from +5°C to +40°C
Medium temperature	from +5 to +95°C

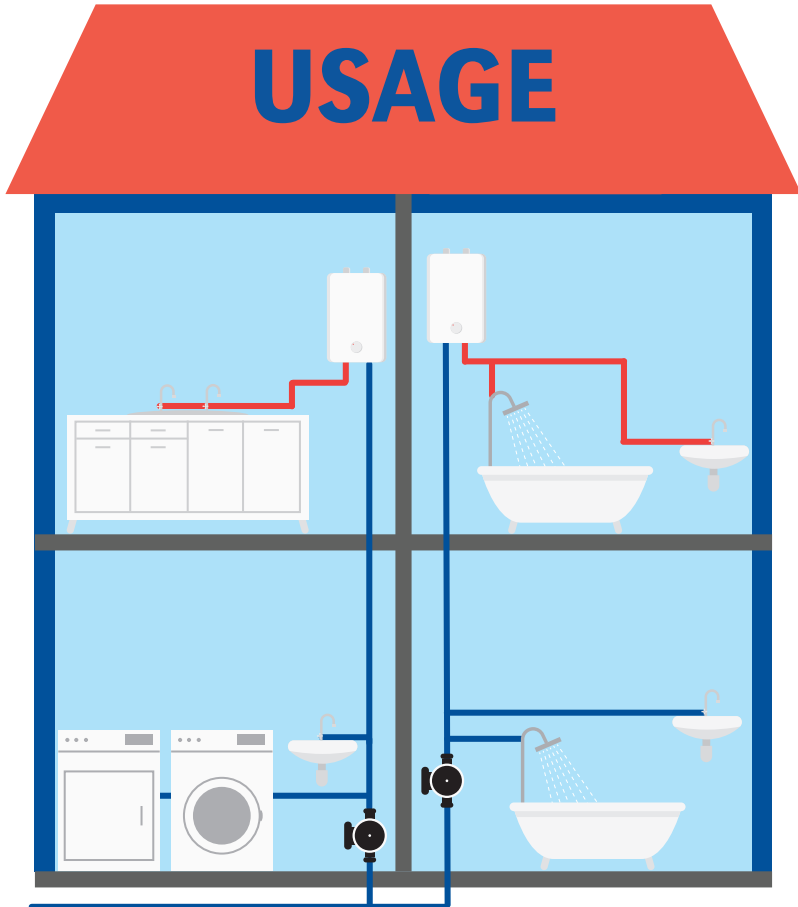

## **ADVANTAGES:**

- **Automatic pressure boosting to satisfy water needs**
- **Inverter motor for high efficiency and total control**
- **ON/OFF button**
- **Low energy consumption**
- **Silent functioning**
- **No presence of a mechanical flow switch (no noise and a lower possibility of faults)**
- **Ceramic shaft and bearings for a longer working life**
- **Optional adapter for 200mm fitting length**